


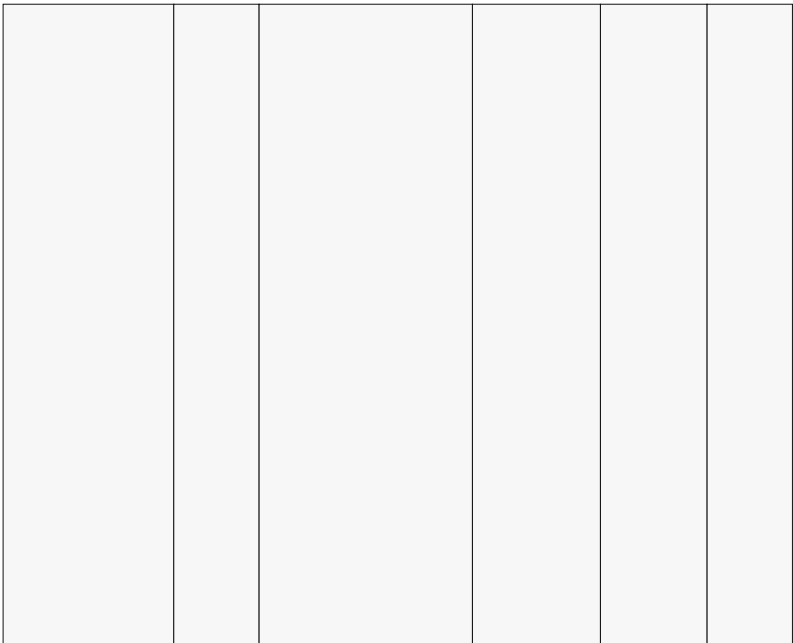

AOR / PE CONFIRM ASSEMBLY

Listing required for Type IIIA / IIA path
Exterior noncombustible or FRT as type requires
160 mph continuous load path into foundation
Opening headers / kings / jacks per PE + TAKEOFF A.6
Floor-line firestopping · cavity barriers
IECC U-factor compliance via assembly calc
Sheathing: see ALT-ENV takeoff F.1 NET SF
Interior finish class A corridors

CD DRAFT for bidding & AOR/PE completion. Geometry & TAKEOFF-4 quantities locked. Member sizes, sealed calcs, shop drawings by licensed professionals.

MIRAGE @ MANHATTAN

1705 Manhattan Blvd · Harvey LA 70058 · Jefferson Parish

TYPICAL EXTERIOR CFS WALL SECTION

SHEET A3.1

SCALE: 1'-1/2"=1'-0"

CD-DRAFT-2 · FULL BUILD-OUT · Jul 15, 2026

OWNER-GC CD DRAFT · NOT SEALED

AOR / PE SEAL

(blank — Louisiana license)